


产品简介

RY-1300B型热压接机的用途是将一端斜磨后的二块同厚度、宽度基本相同的芯板拼接成整张芯板，达到单板整张化。该机具有工作稳定，压合力大，自动对接，时间自控，温度自控等特点。是胶合板行业生产优质产品必备的设备之一。

Introduction

PY-1300B-type splicing machine uses hot end of the ramp is to wear the same after the two thickness,width basically the same Core spliced into the entire Core, to entire of veneer. This machine has a stable job,the pressure

直线导轨

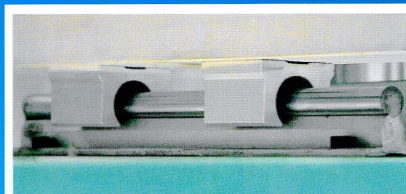

此处采用直线导轨运动，降低了故障率，提高了拼接精度。



设备参数	DEVICE PARAMETERS
压合长度: 1300mm	Lamination length: 1300mm
压合宽度: ≤40mm	Lamination width: 40mm
上加热管功率: 4kW	On the heating pipe power: 4kW
下加热管功率: 4kW	Heating pipe under power: 4kW
压合压力: 2.4t	Lamination Pressure: 2.4t
工作气压: ≤0.6MPa	Working pressure: ≤0.6MPa
外形尺寸: 1735x1000x1690mm	Sizer: 1735x1000x1690mm
总 重: 800kg	Total weight: 800kg